

# CM27T



## Universal tyre-changer for truck and bus wheels 13" ÷ 27"

Mandrino universale, autocentrante, idraulico, bidirezionale, a due velocità di rotazione e comando a distanza mobile.

Two rotating speeds, bi-directional, hydraulic, self-centering universal chuck and mobile control unit.

Mandrin universel, à centrage automatique, hydraulique, bidirectionnel, à deux vitesses de rotation et commande à distance mobile.

Zweiseitig arbeitende hydraulische selbstzentrierende Universalspindel, mit Doppelgeschwindigkeit und beweglicher Fernantrieb.

Mandril universal, autocentrante, hidráulico, bi-direccional, con dos velocidades de rotación y mando a distancia móvil.




# CEMB


BALANCING MACHINES

Per ruote da	It handles wheels from	Pour roues de	Spannbereich	Para ruedas de	13" - 27"
Peso max. ruota	Max. wheel weight	Poids maxi. roue	Maximalgewicht des Rads	Peso màx. rueda	1500 Kg
Larghezza max. ruota	Max. wheel width	Largeur maxi. roue	Radbreite	Ancho màx. rueda	780 mm (30,5")
Diametro max. ruota	Max. wheel diameter	Diam. maxi. roue	Max. Raddurchmesser	Diam. màx. rueda	1600 mm (63")
Motore centralina idraulica	Hydraulic unit motor	Moteur de la centrale hydraulique	Hydraulikaggregat-Motor	Motor central hidráulica	1,1 kW 3 ph - 230/400 V
Motore mandrino autocentrante	Chuck motor	Moteur du mandrin centreur	Spannfuttermotor	Motor del mandril autocentrante	1,3 - 1,8 kW 3 ph - 400 V
Pressione di servizio	Operating pressure	Pression de Service	Betriebsdruck	Presión de trabajo	0 ÷ 130 bar
Forza stallonatore	Bead breaker force	Force décolleur	Abdrückkraft	Fuerza destalonador	1865 Kg
Livello di rumore in condizioni di lavoro	Noise level in working condition	Niveau de bruit en condition de travail	Geräuschpegel bei Betrieb	Nivel de rumor en condición de trabajo	< 70 dB(A)
Peso netto	Net weight	Poids net	Nettogewicht	Peso neto	560 Kg
Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto	630 Kg
Dimensioni imballo	Packing dimensions	Dimensions emballage	Kistenabmessungen	Dimensiones embalaje	1500x1600x 1050 h mm

Accessori standard - Standard accessories - Accessoires en dotation - Standard Zubehörteile - Accesorios en dotación



Leva per cerchietti  
Rim lever  
Lever pour tringles  
Hebel für Wulstkerne  
Palanca para aritos



Leva alzatalloni  
Bead lifting lever  
Lever décolle-talons  
Wulstausdrückhebel  
Palanca destalonadora



Pinza per cerchi  
Rim pliers  
Pince pour jantes  
Felgenzange  
Tenaza para llantas

Accessori opzionali - Optional accessories - Accessoires sur demande - Optionszubehörteile - Accesorios opcionales




Rullo per ruote tubeless  
Roller for tubeless  
Rouleau pour roues tubeless  
Walze für Tubeless-Räder  
Rodillo para ruedas tubeless




Pinza per cerchi in lega  
Pliers for alloy rims  
Pince pour jantes en alliage  
Zange für Leichtlegierunfelgen  
Tenaza para llantas en liga




Coppia di morsetti con vite per stallonatura contemporanea di cerchio e cerchietto  
Couple of screw clamps for contemporaneous bead breaking of rim and rim ring  
Couple de plots avec vis pour détalonnage simultané de jante et tringle  
Klauenpaar mit Schraube zum gleichzeitigen Abdrücken von Felge und Wulstern  
Par de ganchos con tornillo para entalonadura contemporánea de aro y arito



Serie di protezioni griffe per cerchi in lega  
Jaw protections for alloy rims  
Protections des griffes pour jantes en alliage  
Satz von Klauenschütze für Leichtlegierunfelgen  
Juego de protecciones mordazas para llantas en liga



Leva guida alzatalloni per ruote agricoltura  
Bead lifting guide lever for agricultural tyres  
Lever guide décolle-talon pour roues agricoles  
Wulstabdrück-Führungshebel für Ackerbaureifen  
Palanca guía destalonadora para ruedas agricultura

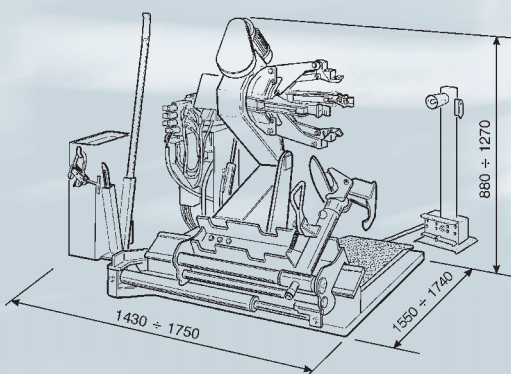

CEMB S.p.A.  
Via Risorgimento, 9  
23826 Mandello del Lario (LC) Italy  
www.cemb.com



Garage equipment division:  
phone +39 0341 706369  
fax +39 0341 700725  
garage@cemb.com

All the data and features mentioned in this catalogue are purely for information and do not constitute any commitment on the part of our company, which reserves the right to make any and all alterations it may consider suitable without notice.