

ROTARY

TWO-POST LIFTS

SGL35



SGL35

THE SGL35 IS THE MOST COST-EFFECTIVE ENTRANCE INTO THE WORLD OF HYDRAULIC LIFTS WITH TWO COLUMNS. COMPACT DIMENSIONS, MULTIPARTITE SUPPORTING ARMS DESIGN AND AN ERGONOMIC CONTROL ALLOW FOR EFFICIENT OPERATION IN THE CAR REPAIR SHOP.

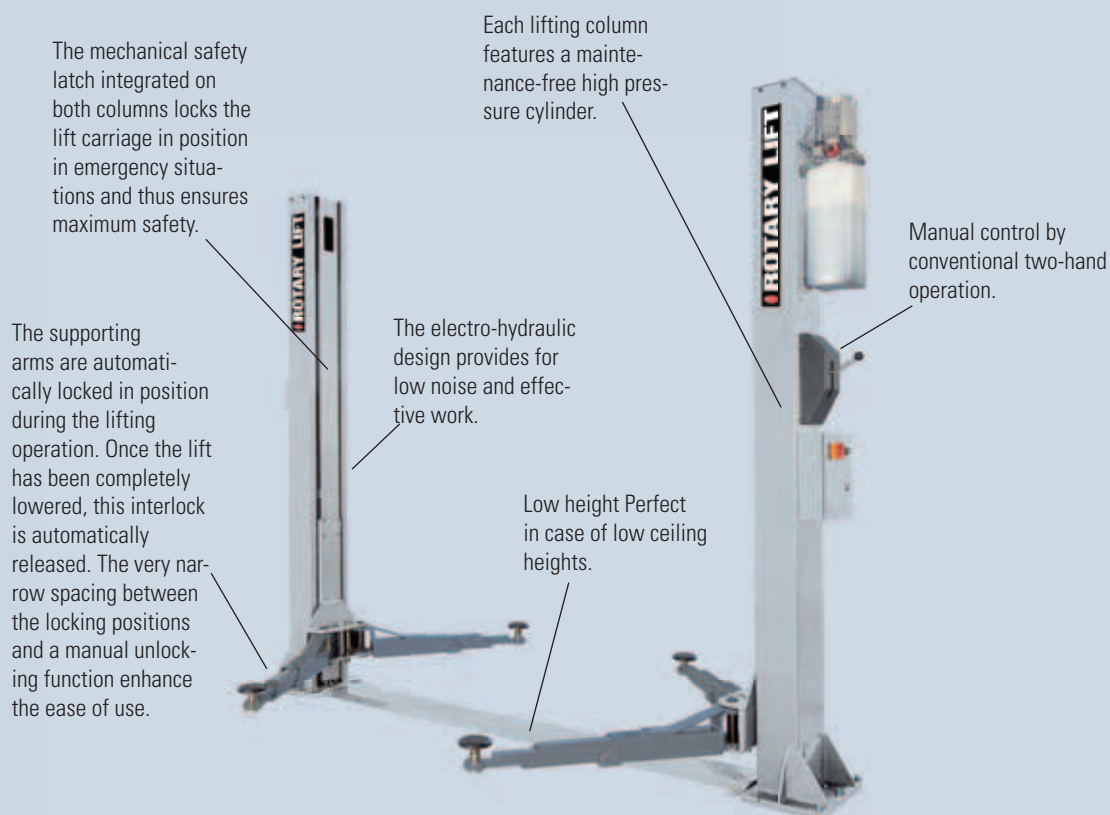


Illustration shows SGL35

ACCESSORIES

Rotary adaptor extension kit for passenger cars
(4 x 89 mm, 4 x 127 mm)




Rotary adaptor extension kit for delivery trucks/vans
(4 x 200 mm)



Car safety device for pivoting plate with diameter 120 mm



Model:	SGL35
	3-stage sup. arms
Capacity	3500 kg
A. Stroke	1828 mm
B. Overall height	3160 mm
C. Overall width	3320 mm
D. Drive-through width	2388 mm
F. Support bracket length on the front min.	600 mm
G. Support bracket length on the front max.	1280 mm
H. Support bracket length on the rear min.	600 mm
I. Support bracket length on the rear max.	1280 mm
J. Rotary plate height min.	110 mm
K. Rotary plate height max.	166 mm
M. Column spacing, interior dimension	2688 mm
Motor performance	2,2 kW
Electrical connection (3 phases)	400 V, 50 Hz
Lifting time	40 sec.
Required ceiling height	3170 mm

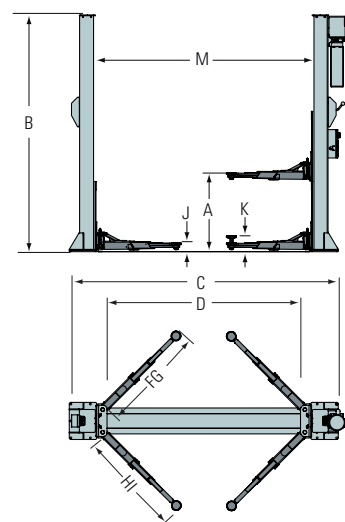

SGL35

BlitzRotary GmbH
Hüfinger Straße 55
D-78199 Bräunlingen
A DOVER COMPANY

Fon +49.771.9233.0
Fax +49.771.9233.99
info@blitzrotary.com
www.blitzrotary.com

USA: +1.812.273.1622 (Headquarter)
Canada: +1.905.812.9920
United Kingdom: +44.178.747.7711
AustralAsia: +60.3.7660.0285

Latin America/Caribbean: +1.812.273.1622
Middle East/Northern Africa: +49.771.9233.0
Southern Africa: 1.812.273.1622
Brazil: +55.11.4534.1995

